


Threaded Sealing Plugs with drain head design

Strong Nylon PA 6, yellow

Designed to protect unified / straight threaded ports

Each plug features an integral tight fit sealing lip along with five complete threads

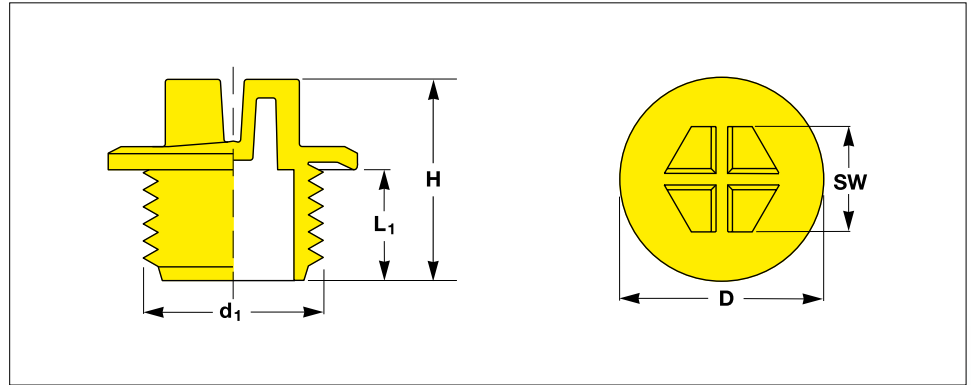

Metric DIN 3852-1 / DIN ISO 6149-1

All dimensions in mm

Thread Size	Flange	Thread Length	Total height	Spanner Size	Standard Colour	Reference No.
d ₁	D	L ₁	H	SW		
M 10 × 1	15.4	8.0	15.0	7	yellow	EP 436 – M 10 × 1
M 12 × 1.5	18.5	9.0	16.5	10	yellow	EP 436 – M 12 × 1.5
M 14 × 1.5	20.3	9.0	17.0	10	yellow	EP 436 – M 14 × 1.5
M 16 × 1.5	23.6	10.0	20.0	13	yellow	EP 436 – M 16 × 1.5
M 18 × 1.5	25.5	11.0	20.6	13	yellow	EP 436 – M 18 × 1.5
M 22 × 1.5	28.4	12.2	21.7	15	yellow	EP 436 – M 22 × 1.5
M 27 × 2	33.4	15.0	25.0	19	yellow	EP 436 – M 27 × 2
M 30 × 2	35.9	10.0	20.0	24	yellow	EP 436 – M 30 × 2
M 33 × 2	42.5	15.0	25.0	24	yellow	EP 436 – M 33 × 2
M 36 × 2	44.1	10.0	20.0	24	yellow	EP 436 – M 36 × 2
M 42 × 2	51.3	15.0	26.0	24	yellow	EP 436 – M 42 × 2
M 45 × 2	54.9	14.6	25.7	30	yellow	EP 436 – M 45 × 2
M 48 × 2	56.7	17.0	28.0	30	yellow	EP 436 – M 48 × 2
M 52 × 2	60.5	17.0	27.7	30	yellow	EP 436 – M 52 × 2

ISO 11926-1

Thread Size	Flange	Thread Length	Total height	Spanner Size	Standard Colour	Reference No.
d ₁	D	L ₁	H	SW		
7/16 – 20 UNF	17.5	9.2	16.0	10	natural	EP 436 – .7/16" – 20 UNF
9/16 – 18 UNF	21.4	10.0	18.0	10	natural	EP 436 – .9/16" – 18 UNF
3/4 – 16 UNF	27.3	11.0	21.0	13	natural	EP 436 – .3/4" – 16 UNF
7/8 – 14 UNF	30.5	13.0	23.0	15	natural	EP 436 – .7/8" – 14 UNF
1 1/16 – 12 UN	38.2	15.0	25.0	19	natural	EP 436 – 1.1/16" – 12 UN
1 5/16 – 12 UN	44.8	15.0	25.0	24	natural	EP 436 – 1.5/16" – 12 UN
1 5/8 – 12 UN	56.0	15.0	26.0	30	natural	EP 436 – 1.5/8" – 12 UN
1 7/8 – 12 UN	63.7	15.0	26.0	30	natural	EP 436 – 1.7/8" – 12 UN

Material :

Premium, impact resistant Nylon (PA 6)

Standard Colours :

yellow, natural

Designed to protect unified / straight threaded ports. Each plug features an integral tight fit sealing lip along with five complete threads.

Exist in a wide range of thread types. Head designed to drain liquids. Large flange design.

Think Plastic. Go Protec.®

PROTEC
PLASTICS

Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Threaded Sealing Plugs with drain head design

Strong Nylon PA 6, yellow

Designed to protect unified / straight threaded ports

Each plug features an integral tight fit sealing lip along with five complete threads

TRIPLE ADVANTAGE of PROTEC CAPTOP®

QUALITY. Protective sealing during painting processes and testing. Drain head design allows all fluids to drain off. To protect unified / straight threaded ports and fittings according to DIN 3852-1 Metric, SAE J 1926 UN/UNF.

This plug is engineered with five complete threads to provide a tight fit. The "sealing lip" enables each plug to provide a secure seal to a specific torque for each size.

EP 436 plugs can be fitted and removed with a screwdriver, socket wrench, power tool or by hand. Nylon offers high resistance against hydraulic fluids, acids, base alkalines and solvents.

AVAILABILITY. With over 400 million moulded components shipped from our UK logistics center we provide the fastest on time delivery service to all industries of the UK market.

PHILOSOPHY. Innovative protective closures at the best price in the market.



CAPTOP®



Material :
Premium, impact resistant Nylon
(PA 6)

Standard Colours :
yellow, natural

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

**PROTEC
PLASTICS**