


Quick-Fit® Cable Glands, Brass, Nickel plated

Easy-to-install. Integrated strain relief, built-in twisting protection, wide sealing and clamping range

EX STOCK
400m
Parts
DELIVERY SERVICE

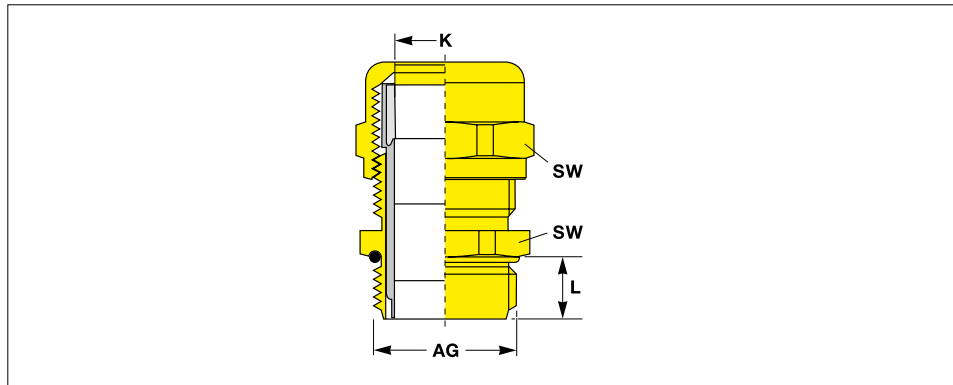

Metric

All dimensions in mm

Thread size	Clamping range	Length of thread	Spanner size	Reference-No.
AG	K	L	SW	
M 12 × 1.5	3.0 – 6.0	5.0	SW 14	EPN 700 / M 12 MS
M 16 × 1.5	5.0 – 9.0	5.0	SW 17	EPN 700 / M 16 MS
M 20 × 1.5	8.0 – 13.0	6.0	SW 22	EPN 700 / M 20 MS
M 25 × 1.5	11.0 – 16.0	7.0	SW 27	EPN 700 / M 25 MS
M 32 × 1.5	15.0 – 21.0	8.0	SW 34	EPN 700 / M 32 MS
M 40 × 1.5	19.0 – 27.0	8.0	SW 43	EPN 700 / M 40 MS
M 50 × 1.5	24.0 – 35.0	9.0	SW 55	EPN 700 / M 50 MS
M 63 × 1.5	34.0 – 44.0	10.0	SW 65	EPN 700 / M 63 MS

PG

All dimensions in mm

PG 7	3.0 – 6.0	5.0	SW 14	EPN 700 / PG 7 MS
PG 9	4.0 – 8.0	6.0	SW 17	EPN 700 / PG 9 MS
PG 11	5.0 – 10.0	6.3	SW 20	EPN 700 / PG 11 MS
PG 13.5	6.0 – 12.0	6.5	SW 22	EPN 700 / PG 13.5 MS
PG 16	10.0 – 14.0	6.8	SW 24	EPN 700 / PG 16 MS
PG 21	13.0 – 18.0	7.0	SW 30	EPN 700 / PG 21 MS
PG 29	16.0 – 25.0	8.0	SW 40	EPN 700 / PG 29 MS
PG 36	19.0 – 32.0	9.0	SW 50	EPN 700 / PG 36 MS
PG 42	28.0 – 38.0	10.0	SW 57	EPN 700 / PG 42 MS
PG 48	34.0 – 44.0	10.0	SW 64	EPN 700 / PG 48 MS

Material :
Brass,
nickel plated

Blade insert :
Polyamide PA6 V-2

Sealing ring :
Polychloroprene-Nitrile rubber
CR/NBR

O-Ring :
Nitrile rubber NBR

Protection class :
IP68

Easy-to-install. Integrated strain relief, built-in twisting protection, wide sealing and clamping range

Think Plastic. Go Protec.®



Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Quick-Fit® Cable Glands, Brass, Nickel plated

Easy-to-install. Integrated strain relief, built-in twisting protection, wide sealing and clamping range

TRIPLE ADVANTAGE of PROTEC QUICK-FIT®

QUALITY. A wide range of high strength compression type cable glands manufactured in nickel plated brass with either PG or metric thread.

Protection similar to IP 68 is achieved by employing a fully insulated Neoprene cable seal and Perbunan O-Ring on external fixing thread.

AVAILABILITY. With over 400 million moulded components shipped from our UK logistics center we provide the fastest on time delivery service to all industries of the UK market.

PHILOSOPHY. The highest degree of Protec Quick-Fit functionality and safety at the best price in the market.



Material :
Brass,
nickel plated

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

PROTEC
PLASTICS